

TA 60 - 60CF

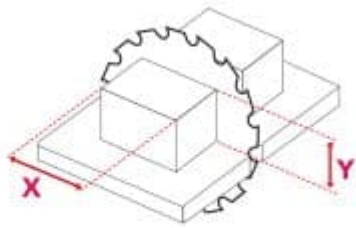


Categories: [Cut-off Saw](#)

HYDRAULIC CUT-OFF SAWS TA 60 - TA 60CF

TECHNICAL DATA:

	TA 60	TA 60CF
Blade diameter	mm 600	mm 600
Max operating pressure	bar 70	bar 70
Motor power	HP 12	HP 12
Motor speed	rpm 3000	rpm 2636
Weight	kg 570	kg 780

**TA 60**

X	Y
610 mm	30 mm
580 mm	60 mm
530 mm	100 mm
490 mm	120 mm
450 mm	140 mm
380 mm	160 mm

TA 60CF

X	Y
660 mm	30 mm
640 mm	50 mm
600 mm	90 mm
550 mm	130 mm
460 mm	170 mm
300 mm	200 mm

STANDARD EQUIPMENT

- Hydraulic operation of saw assembly
- Adjustable blade ascent speed
- Protection grid on cutting area (TA 60)
- Widia blade
- 1m work surface to the right of the blade
- 1m work surface to the left of the blade
- Side material loading

CE EQUIPMENT

- Hydraulic operation of saw assembly
- Motor brake
- Two-handed control for operator safety
- CE wiring
- Adjustable blade ascent speed
- Protection grid on cutting area (TA 60)
- Widia blade
- 1m work surface to the right of the blade
- 1m work surface to the left of the blade
- Side material loading (TA 60)
- Front and side material loading (TA 60CF)