


SE 1.2-1.6-2.2 PLUS



Categories: [Panel Saw](#), [SE PLUS](#)

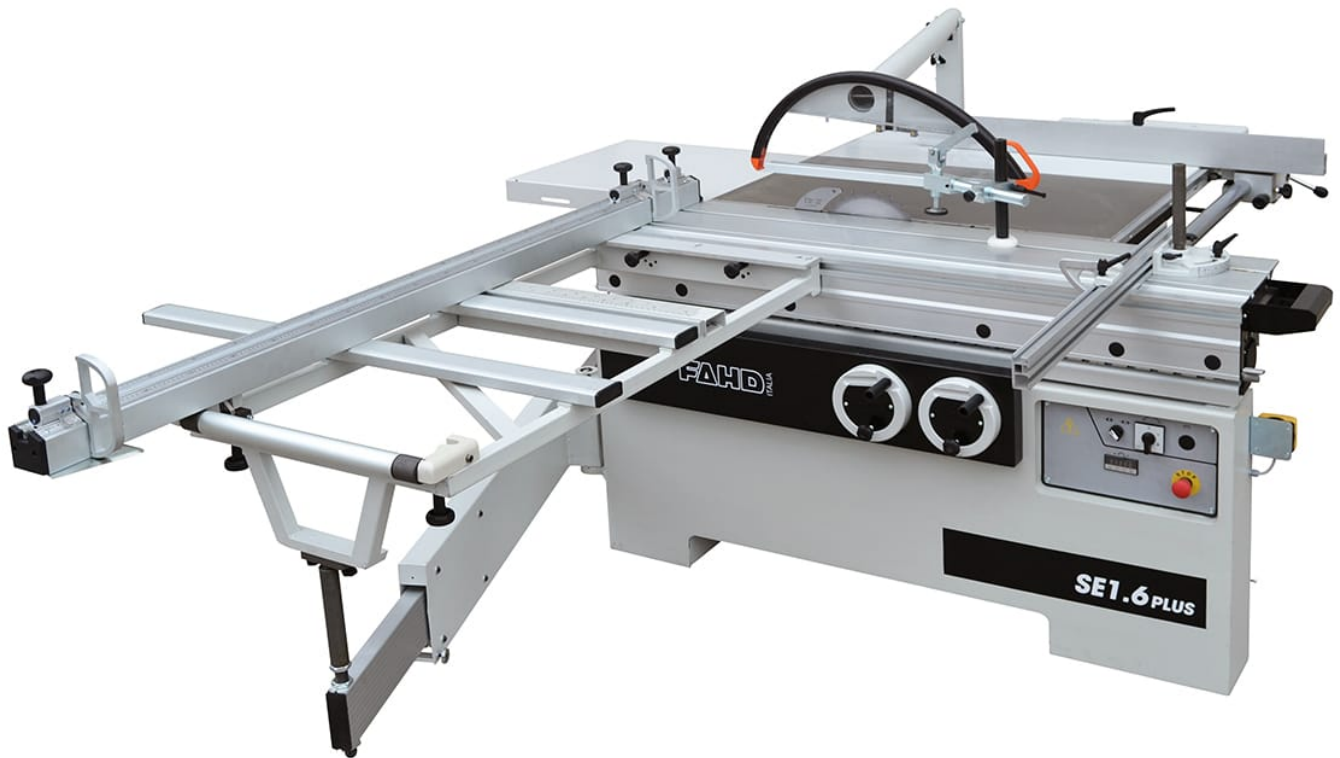

PANEL SAW SE1.2 PLUS - SE1.6 PLUS - SE2.2 PLUS

Max blade \varnothing 450 mm.

TECHNICAL DATA

	SE1.2 PLUS	SE1.6 PLUS	SE2.2 PLUS
Sliding table dimension	mm 1250x385	mm 1600x385	mm 2200x385
Table dimensions	mm 650x1100	mm 650x1100	mm 650x1100
Squaring frame dimensions	mm 580x915	mm 580x915	mm 580x915
Saw blade bladeØ/holeØ	mm 400/30	mm 400/30	mm 400/30
Cutting height with blade Ø 300 mm 90°/45°	mm 80/58	mm 80/58	mm 80/58
Cutting height with blade Ø 400 mm 90°/45°	mm 130/93	mm 130/93	mm 130/93
Cutting height with blade Ø 450 mm 90°/45° (OPT) at lowest position the blade sticks out from the table of 25 mm	mm 155/110	mm 155/110	mm 155/110
Cutting width on rip fence	mm 1250	mm 1250	mm 1250
Saw blade speed	rpm 4000	rpm 4000	rpm 4000
Motor power	HP 7,5	HP 7,5	HP 7,5
Weight	kg 620	kg 650	kg 680

STANDARD EQUIPMENT

- Manual rise & tilt by means of hand wheels located in frontal position
- HM saw blade
- Saw blade safety protection
- Electronic digital readout for tilting
- Table extension
- Angular cutting device
- Eccentric clamp
- No. 2 dust extraction hoods (1 x Ø 120mm, 1 x Ø 60mm)
- Manual delta/star switch on

CE EQUIPMENT

- Manual rise & tilt by means of hand wheels located in frontal position
- HM saw blade
- Hanging saw blade safety protection "CX 400"
- Electronic digital readout for tilting
- Table extension
- Angular cutting device
- Eccentric clamp
- No. 2 dust extraction hoods (1 x Ø 120mm, 1 x Ø 80mm)
- Self-braking motor
- Manual delta/star switch on