


# SE 2.6-3.2-3.8 PLUS



Categories: [Panel Saw](#), [SE PLUS](#)

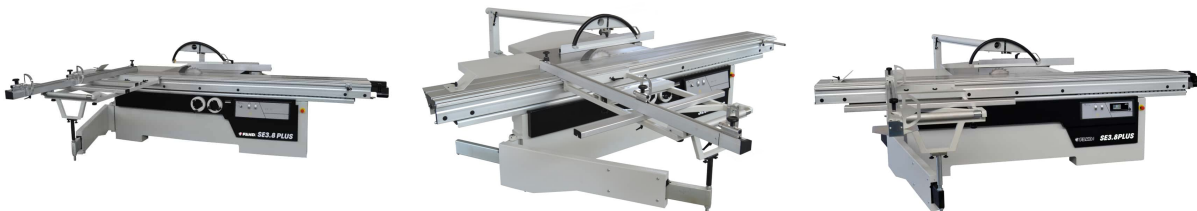

## PANEL SAW SE2.6 PLUS - SE3.2 PLUS - SE3.8 PLUS

Max blade Ø 450mm.

## TECHNICAL DATA

	<b>SE2.6 PLUS</b>	<b>SE3.2 PLUS</b>	<b>SE3.8 PLUS</b>
Sliding table dimensions	mm 2600x400	mm 3200x400	mm 3800x400
Table dimensions	mm 650x1100	mm 650x1100	mm 650x1100
Squaring frame dimensions	mm 640x1190	mm 640x1190	mm 640x1190
Saw blade bladeØ/holeØ	mm 400/30	mm 400/30	mm 400/30
Cutting height with blade Ø 300 mm 90°/45°	mm 80/58	mm 80/58	mm 80/58
Cutting height with blade Ø 400 mm 90°/45°	mm 130/93	mm 130/93	mm 130/93
Cutting height with blade Ø 450 mm 90°/45° at lowest position the blade sticks out from the table of 25 mm	mm 155/110	mm 155/110	mm 155/110
Scoring blade bladeØ/holeØ	mm 120/20	mm 120/20	mm 120/20
Scoring blade speed	rpm 7500	rpm 7500	rpm 7500
Scoring motor power	HP 1	HP 1	HP 1
Cutting width on rip fence	mm 1250	mm 1250	mm 1250
Saw blade speed	rpm 2800/4000/5600	rpm 2800/4000/5600	rpm 2800/4000/5600
Saw blade motor power	HP 7,5	HP 7,5	HP 7,5
Weight	kg 730	kg 800	kg 840

## STANDARD EQUIPMENT

- Powered saw blade unit upstroke
- Powered saw blade unit tilting with quota positioning
- HM saw blade
- Saw blade safety protection
- Electronic digital readout for tilting
- Table extension
- Angular cutting device
- Eccentric clamp
- No. 2 dust extraction hoods (1 x Ø 120mm, 1 x Ø 60mm)
- Manual delta/star switch on
- Scoring unit with independent motor

## CE EQUIPMENT

- Powered saw blade unit upstroke
- Powered saw blade unit tilting with quota positioning
- HM saw blade
- Hanging saw blade safety protection "CX 400"
- Electronic digital readout for tilting

- Table extension
- Angular cutting device
- Eccentric clamp
- No. 2 dust extraction hoods (1 x  $\varnothing$  120mm, 1 x  $\varnothing$  80mm)
- Start and stop of the main motor managed by inverter
- Saw blade speed managed by inverter with selector 3 position on control panel
- Scoring unit with independent motor